



JANUARY 2025

SUPERDOPE ANAEROBIC THREAD SEALANT



State of the Art Anaerobic Thread Sealant that chemically hardens in the absense of air into a tough, structural solid.

- •Will not loosen, set or shrink
- •Only put on 1st, 2nd & 3rd threads ...uses less material
- •Cures to pipe burst pressure
- Pipe joints and fittings are locked against vibration loosening
- •Seals regardless of a multitude of mistakes

Click Here to Purchase Download Tech Data Download SDS





TUF-GLIDE THREAD SEALANT WITH PTFE



- •The thread sealant that started it all for ARGCO back in the 1980s.
- •Pipefitters Report that Tuf-Glide is Easier to apply, easier to pull up on pipe wrench, greatly reduced effort and eliminates leaks.
- •Sticks to hot, oily pipe, drips less, and saves oil, dies and money!

Click Here to Purchase Download Tech Data Download SDS





LEAK LOCK THREAD SEALANT



- •High strength, pipe joint sealant consisting of chemically resistant film formers, plasticers, reinforcing fillers and solvents.
- •Resin based brushable paste which remains permanently flexible, adheres to internal surfaces and fills voids Ideal for metal and plastic materials subject to extreme vibrations.

Click Here to Purchase Download Tech Data Download SDS



DOPE BRUSH



Click Here to Purchase

Click Here to Purchase

PIPE MARKING PENS

Download Tech Data
Download SDS







PIPING CHEMICALS

PTFE THREAD SEAL TAPE

When it comes to options, ARGCO has more options than most. Standard Density, High Density, or Premium Density Gas Tape. ARGCO offers it all, including domestic or import. So, if you have a specific need for a PTFE tape, ARGCO can supply the product for you.



INDUSTRIAL (0.4 DENSITY)

Click Here to Purchase **Download Tech Data Download SDS**



HIGH (0.8) DENSITY

Click Here to Purchase **Download Tech Data Download SDS**



PREMIUM (1.0) DENSITY

Click Here to Purchase **Download Tech Data Download SDS**

TUF-LUBE GASKET GREASE

- •Resists evaporation and will not freeze.
- Compatible with CPVC

Click Here to Purchase **Download Tech Data Download SDS**









Grooved Couplings Available Click Here for details

SUPER WELD ANAEROBIC WELD SEALANT

- Low viscosity porosity sealant
- •Seeks out casting irregularities and penetrates the smallest pores or cracks
- •Wicking adhesive sealant prevents loosening of metal threaded fasteners
- •Fluorescent under UV lamps for inspections
- •Comparable to Loctite* 290

*LOCKTITE IS A REGISTERED TRADEMARK OF LOCTITE CORP. NEWINGTON, CT



Click Here to Purchase **Download Tech Data Download SDS**



FIRE STOP

HILTI FS-ONE Max Firestop Sealant Foil

Click Here to Purchase Download Tech Data **Download SDS**



3600EX Fire & Smoke Stop Sealant for Plastic Pipe

Click Here to Purchase Download Tech Data **Download SDS**











HILTI FS-ONE Max Firestop Sealant Tube

Click Here to Purchase **Download Tech Data Download SDS**



4800DW Fire & Smoke Stop Sealant for Metal Pipe

Click Here to Purchase **Download Tech Data Download SDS**









PIPING CHEMICALS

THREADING OIL

DARK: Sulfur added to prevent metal-to-metal contact, and reduce friction & heat build-up.

LIGHT: Light mineral oil base provides better lubrication and heat dispersion characteristics and prevents binding and catching of dies.

<u>Available in 1 Gallon Jugs and 55 Gallon Drums</u> Click Here to Purchase

•Dark Oil Tech Data •Light Oil Tech Data

•Dark Threading Oil SDS •Light Threading Oil SDS







Replacement Oiler Unit Available. Click Here for details

Click here for all Threading Machine Replacement Parts



TYCO LFP® ANTIFREEZE FOR FIRE PROTECTION





- •Pre-Mixed for system volumes up to 500 gallons (1893 liters).
- •UL and cUL Listed, UL and cUL Certified
- •FBC™ System Compatible for use with BlazeMaster® CPVC pipe & fittings
- •Meets NFPA 13, 13R, 13D and 25 requirements for use of listed antifreeze



- •<u>The original LFP® Antifreeze</u>, the first UL Listed antifreeze, features a minimum use temperature of -23.3°C / -10°F. 5 Gallon Pails 30 Gallon Drums 250 Gallon Totes Download Tech Data
- •LFP® Antifreeze+ features a minimum use temperature of -32°C / -25°F.
- 5 Gallon Pails 30 Gallon Drums 250 Gallon Totes Download Tech Data

Both products are available for residential, commercial, and some storage applications. Download Tech Data





FACTORY PRE-MIX
GLYCERINE & PROPYLENE
GLYCOL

Click Here for Details



Digital Refractometers Click Here for details



ANTI-FREEZE SYSTEM Identification Signs Available Click Here for details



PH: 800.854.1015 • ARGCO.com

REV. 5/23/2024

WHY ARGCO?

Since 1981, ARGCO has been saving contractors significant money on quality products they use every day.



Argco Factory-Direct Pricing:

Volume Structured Savings from case through pallet quantity to Factory-Direct Container pricing.



Service Commitment:

Place your full box order by 9:30 am and in-stock items will go out that Same Day. Click here to see if you are within One-Day Shipping



Guaranteed Quality:

We stand behind our own brand, our own product. Same UL and FM listings and certifications as our competitors. 100% "No Questions Asked" Return Policy.



Inventory:

West Coast , East Coast and Midwest Warehouses. One or Two day delivery to most locations in the U.S.



Innovative Products:

Argco's investment in engineering is developing new time-saving tools.



Benefits of Online Buying:

Place your orders 24 hours a day, with your contractor discount.

- •Check our \$8 million live in-stock levels, online.
- •Complete anonymity. You don't have to deal with a sales rep if you prefer.



Free Samples:

Check out our quality first.

Call for free samples before you buy.




Industry Support:

We are proud active members of the AFSA, NFSA, NFPA & SFPE

ARGCO.com

ARGCO SALES: toll free: 800-854-1015 | international: 760-727-1644 | fax: 800-924-5922 | email: sales@argco.com

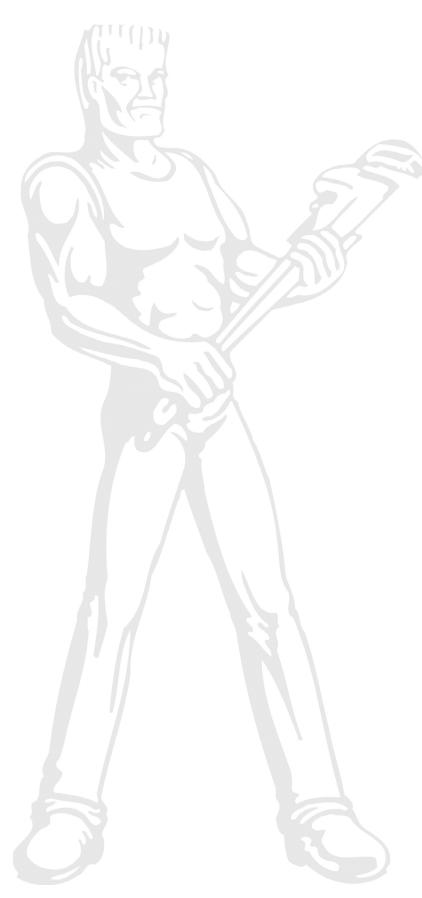







American Fire Sprinkler Association

Engineering A Fire Safe World ®

ARGCO SALES: toll free: 800-854-1015 | international: 760-727-1644 | fax: 800-924-5922 | email: sales@argco.com