



data sheet



GUARANTEED



CPVC FITTING - 45° ELBOW SOCKET X SOCKET

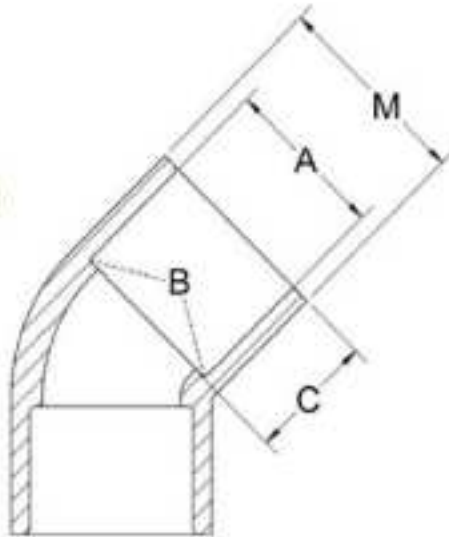


- Pressured Rated to 175 psi @ 150°F (1200kpa @ 65°C)
- Corrosion Resistant CPVC Material Does Not Sustain Biological Growth
- Superior Flow Characteristics
- 10 Year Limited Warranty



(UL Listed for up to 1")

Part Number	Size	Description	Size	J	H	M	Approx Wt. (Lbs.)
CP45-34	3/4	CP45-34	3/4	15/31	1-11/47	1-13/32	0.10
CP45-1	1	CP45-100	1	17/29	1-42/83	1-25/32	0.11
CP45-114	1-1/4	CP45-114	1-1/4	39/47	1-63/76	2-3/32	0.23
CP45-112	1-1/2	CP45-112	1-1/2	15/32	1-27/32	2-11/32	0.32
CP45-2	2	CP45-200	2	21/32	2-1/8	2-7/8	0.48
CP45-212	2-1/2	CP45-212	2-1/2	15/32	1-27/32	2-11/32	0.32
CP45-3	3	CP45-300	3	21/32	2-1/8	2-7/8	0.48

SOCKET DIMENSIONS



SCH 40 ASTM F438

SCH 80-ASTM F439

SIZE	Socket Ent. A	Socket Bottom B	Tolerance	SCH 40 Minimum Socket Length C	SCH 80 Minimum Socket Length C
3/4"	1.058	1.046	±0.004	0.719	1.000
1"	1.325	1.310	±0.005	0.875	1.125
1-1/4"	1.670	1.655	±0.005	0.938	1.250
1-1/2"	1.912	1.894	±0.006	1.094	1.375
2"	2.387	2.369	±0.005	1.156	1.500
2-1/2"	2.899	2.868	±0.007	1.75	1.750
3"	3.516	3.492	±0.008	1.875	1.875

**FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM**