

CPVC STRAP 90° WRAP AROUND



Provides support for CPVC piping in fire sprinkler systems installed per NFPA 13, 13R and 13D.



- Fasten with a Hex Head Screw, #10 x 1", supplied with the strap.
- Pre-galvanized finish.



INSTALLATION:

1. Snap CPVC hanger onto pipe, dimples hold pipe in place
2. Mount hanger onto wood beam with screws provided
3. May also be used on the underside of beam
4. Anchor tightly to surface

NOTE: Ensure that pipe can slide freely through hanger.

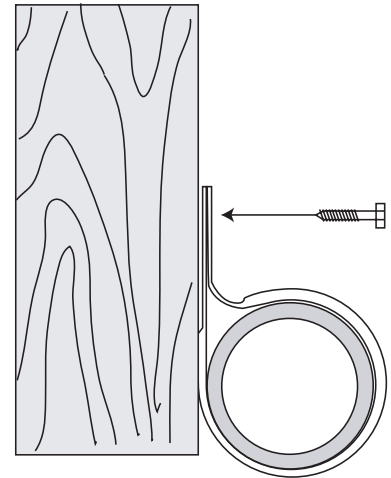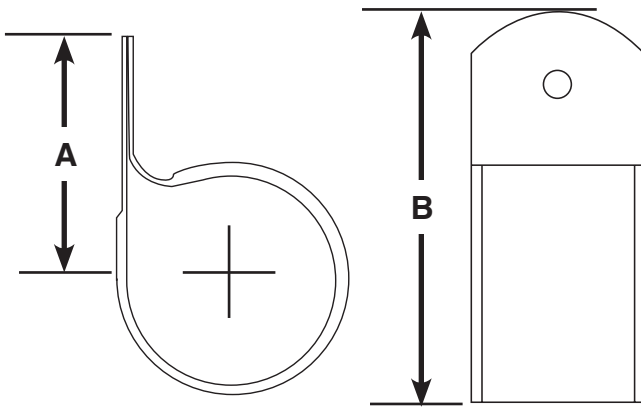

CPVC STRAP 90° WRAP AROUND				MAX HANGER SPACING	CROSS REF	
ITEM #	CPVC PIPE SIZE	A	B		TOLCO®	ERICO®
2530160-3/4	3/4"	1"	2-7/16"	5-1/2"	12722	1070075
2530160-1	1"	1-7/16"	2-11/16"	6"	12746	1070100
2530160-1-1/4	1-1/4"	1-5/8"	3-1/16"	6-1/2"	12753	1070125
2530160-1-1/2	1-1/2"	1-3/4"	3-5/16"	7"	12760	1070150
2530160-2	2"	1-11/16"	3-3/4"	8"	12777	1070200

Galvanized carbon steel construction; supplied with hex slotted screws

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	