


data sheet



CPVC FITTING - COUPLING SOCKET X SOCKET

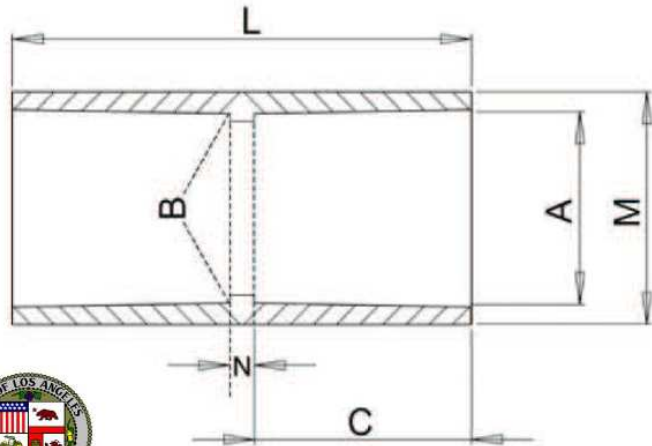


(UL Listed for up to 1")

- Pressured Rated to 175 psi @ 150°F (1200kpa @ 65°C)
- Corrosion Resistant CPVC Material Does Not Sustain Biological Growth
- Superior Flow Characteristics
- 10 Year Limited Warranty

Part Number	Size	L	N	M	Approx Wt. (Lbs.)
CPCUP-34	3/4	2-3/32	8/51	1-5/16	0.05
CPCUP-1	1	2-13/32	8/51	1-5/8	0.08
CPCUP-114	1-1/4	2-9/16	8/51	2	0.13
CPCUP-112	1-1/2	2-15/16	8/51	2-1/2	0.32
CPCUP-2	2	3-5/32	8/51	2-7/8	0.46
CPCUP-212	2-1/2	3-11/16	3/16	3-15/32	0.57
CPCUP-3	3	4	1/4	4-3/16	0.89

SOCKET DIMENSIONS



SCH 40 ASTM F438
SCH 80-ASTM F439

SIZE	Socket Ent. A	Socket Bottom B	Tolerance	SCH 40 Minimum Socket Length C	SCH 80 Minimum Socket Length C
3/4"	1.058	1.046	±0.004	0.719	1.000
1"	1.325	1.310	±0.005	0.875	1.125
1-1/4"	1.670	1.655	±0.005	0.938	1.250
1-1/2"	1.912	1.894	±0.006	1.094	1.375
2"	2.387	2.369	±0.005	1.156	1.500
2-1/2"	2.899	2.868	±0.007	1.75	1.750
3"	3.516	3.492	±0.008	1.875	1.875

FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM