

FIRE HOSE ANGLE VALVES



Angle Hose Valves Aluminum handwheel


- 2-1/2" (65 mm)
- Approved 300 lb. (2070 kPa) pressure tested
- Lightweight cast brass body
- Forgeline Bonnett & Seat Assembly.
- UL, ULC listed and FM approved.
- Cap to be used for thread protection only.
- Finish : Cast Brass. Available chrome plated brass 9 lbs. (4.09 kg)



65-20-010A: Angle Hose Valve Cast Brass
2-1/2" (F) NPT x 2-1/2"(M) NST

65-20-010C: Angle Hose Valve Chrome Plated Cast Brass
2-1/2" (F) NPT x 2-1/2"(M) NST

City threads: Chicago, Cincinnati, Cleveland, Denver, Detroit, Louisville, New York Corp, New York FD, Phoenix, Pittsburgh, Pueblo, Raleigh, Toledo

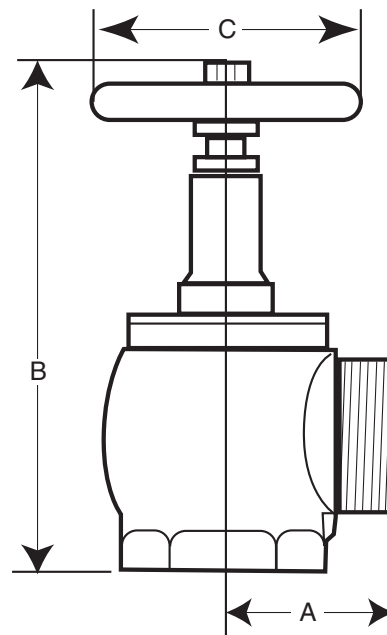

Now available:
Chrome Plated Brass

A	B (open)	B (closed)	C
3-3/16" (79 mm)	11" (275 mm)	9-1/4" (231 mm)	5" (125 mm)

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	

data sheet



2-1/2" SIZE ANGLE HOSE VALVES FRICTION LOSS - CV VALUE 147

