

GROOVED CROSSES SHORT RADIUS

Model 401 (Galvanized)



Available Sizes

- 2" through 12" (50 through 300 mm)

Pipe Material

- Carbon steel, Schedule 10, Schedule 40.
For use with alternative materials and wall thicknesses please contact ARGCO.

Maximum Working Pressure

- Up to 300 psi/20 bar

Function

- Joins carbon steel pipe.
- Provides a rigid pipe joint designed to restrict axial or angular movement.

CERTIFICATIONS/LISTINGS

Underwriters Laboratories, Underwriters Laboratories Canada, Factory Mutual.

SPECIFICATIONS - MATERIAL

Housing Sections: Ductile Iron conforming to ASTM A 536, Grade 65-45-12.

Housing Coating:


Standard: Hot Dipped Galvanized

Available: Orange Enamel

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	

GROOVED CROSSES SHORT RADIUS

Model 401 (Galvanized)

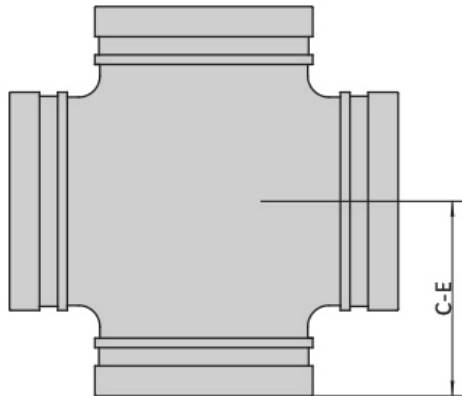

Item #	Nominal Size in/mm	Pipe O.D. in/mm	Max Working Pressure psi/Bar	C-E inches mm
7012224	2"	2.375	300	2.76
	50	60.3	20	70
7012225	2-1/2"	2.875	300	2.99
	65	73	20	76
7012226A	3"	3	300	3.39
	80	76.1	20	86
7012227	4"	3.5	300	4.02
	100	88.9	20	102
7012228A	5"	5.25	300	4.76
	125	133	20	121
7012228	6"	6.25	300	5.12
	150	159	20	130
70123229	8"	8.63	300	6.85
	200	219	20	174

- Working Pressure and End Load are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, standard roll or cut grooved in accordance with ARGCO specifications.