

# SPLIT RING PIPE HANGERS HINGED AND TWO-SCREW




Designed for non-insulated stationary pipe lines in either a horizontal or vertical position.

- Malleable Iron with Electro-Galvanized Finish


Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69.

## HINGED SPLIT RING HANGER

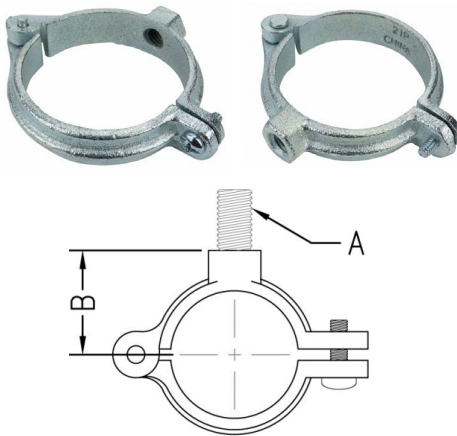

| Item #        | Pipe Size | Rod Size | B        | Maximum Load Capacity (LBS) | Weight (LBS) |
|---------------|-----------|----------|----------|-----------------------------|--------------|
| 2530246-3/8   | 3/8"      | 3/8"-16  | 13/16"   | 180#                        | 0.13         |
| 2530246-1/2   | 1/2"      | 3/8"-16  | 7/8"     | 180#                        | 0.14         |
| 2530246-3/4   | 3/4"      | 3/8"-16  | 1"       | 180#                        | 0.16         |
| 2530246-1     | 1"        | 3/8"-16  | 1-1/8"   | 180#                        | 0.18         |
| 2530246-1-1/4 | 1-1/4"    | 3/8"-16  | 1-5/16"  | 180#                        | 0.22         |
| 2530246-1-1/2 | 1-1/2"    | 3/8"-16  | 1-7/16"  | 180#                        | 0.38         |
| 2530246-2     | 2"        | 3/8"-16  | 1-11/16" | 180#                        | 0.44         |
| 2530246-2-1/2 | 2-1/2"    | 1/2"-13  | 2-1/8"   | 300#                        | 0.45         |
| 2530246-3     | 3"        | 1/2"-13  | 2-7/16"  | 300#                        | 0.55         |
| 2530246-4     | 4"        | 1/2"-13  | 3"       | 300#                        | 0.95         |

## TWO-SCREW SPLIT RING HANGER

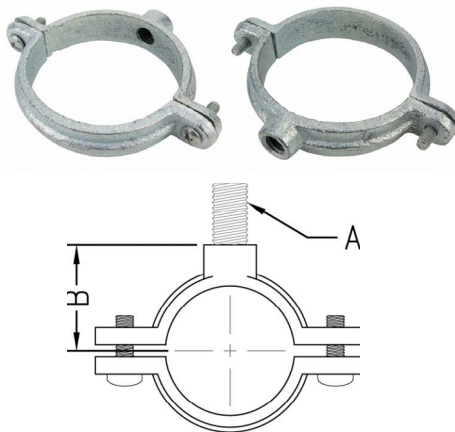

| Item #        | Pipe Size | Rod Size | B        | Maximum Load Capacity (LBS) | Weight (LBS) |
|---------------|-----------|----------|----------|-----------------------------|--------------|
| 2530245-3/8   | 3/8"      | 3/8"-16  | 13/16"   | 180#                        | 0.13         |
| 2530245-1/2   | 1/2"      | 3/8"-16  | 7/8"     | 180#                        | 0.14         |
| 2530245-3/4   | 3/4"      | 3/8"-16  | 1"       | 180#                        | 0.16         |
| 2530245-1     | 1"        | 3/8"-16  | 1-1/8"   | 180#                        | 0.18         |
| 2530245-1-1/4 | 1-1/4"    | 3/8"-16  | 1-5/16"  | 180#                        | 0.22         |
| 2530245-1-1/2 | 1-1/2"    | 3/8"-16  | 1-7/16"  | 180#                        | 0.38         |
| 2530245-2     | 2"        | 3/8"-16  | 1-11/16" | 180#                        | 0.44         |
| 2530245-2-1/2 | 2-1/2"    | 1/2"-13  | 2-1/8"   | 300#                        | 0.45         |
| 2530245-3     | 3"        | 1/2"-13  | 2-7/16"  | 300#                        | 0.55         |
| 2530245-4     | 4"        | 1/2"-13  | 3-11/32" | 300#                        | 0.70         |

|              |  |          |  |              |  |           |  |
|--------------|--|----------|--|--------------|--|-----------|--|
| System No.   |  | Location |  | Spec Section |  | Paragraph |  |
| Submitted By |  | Date     |  | Approved     |  | Date      |  |